

ANCHOR WITH EUROPEAN TECHNICAL APPROVAL ETA 014 A / B IMPACT NAIL-ANCHOR - HEAD Ø 60 MM RIGID INSULATION ANCHOR



• Load: Up to 12.5 Kg

Anchor: White polypropylene
Nail: Black polyamide


SUPER ISO II

Ø / t _{fix} x l	d ₀	≤ t _{fix}	h ₁	Pack.	Code
10 / 45 x 90	10	45	50	300	358 560
10 / 65 x 110	10	65	50	200	358 562
10 / 75 x 120	10	75	50	200	358 564
10 / 90 x 135	10	90	50	200	358 566
10 / 105 x 150	10	105	50	200	358 568
10 / 125 x 170	10	125	50	200	358 570
10 / 145 x 190	10	145	50	200	358 572
10 / 155 x 200	10	155	50	200	358 574
10 / 175 x 220	10	175	50	200	358 576
10 / 195 x 240	10	195	50	200	358 578
10 / 215 x 260	10	215	50	200	358 580

- European Technical Approval ETA - 11/0280 (ETAG 014 A / B)
- Point thermal transmittance = 0,0012 W/K
- Additional 140 mm washer for flexible insulation
- Design use: Fastening rigid insulation - All solid and hollow materials - (*) With prior testing
- **Product definition:**

- Impact anchor. Hammer in
- 60 mm head
- Numerous lengths available, up to 215 mm of insulation
- Expansion nail, 5 mm
- Not UV resistant
- Usage temperature: -30°C to +70°C

- **Cross reference :**
Drill bit, concrete, Ø 10 mm, see page 680

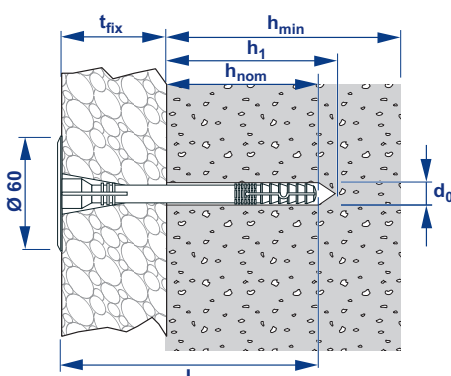

SPREADER WASHER, Ø 140 MM FLEXIBLE INSULATION FASTENER



White polypropylene WASHER SUPER ISO II Ø 140		
Ø	Pack.	Code
140	100	358 581

- Design use: Used with SUPER ISO II anchors to fasten flexible insulation
- Not UV resistant

• d₀ : Support drilling diameter - h₁ : Support drilling depth - L : Length - t_{fix} : Maximum fastenable thickness